

Information about the content

| | | | |
|--------------------|-------------|--------------------------|----------------|
| Scope: | Plansee SE | Prepared/Updated: | Joachim RESCH |
| Valid from: | 10-Feb-2022 | Released: | Wolfgang GLATZ |
| | | Controlled: | PSE-020 |

This document is subject to electronic version control – confirm revision status before using.

This specification covers hot- and cold-rolled tungsten sheets, including sheet cuts.

1 Dimensions and tolerances

1.1 Thickness- and width tolerances

Cold-rolled sheets

| Sheet thickness [mm] | Thickness tolerance | | Width tolerance [mm] |
|-------------------------|------------------------|------------------------------|-------------------------|
| | Width ≤ 200 mm [mm] | Maximal Width 510 mm [mm] | |
| 0,025 | ± 0,003 | - | ± 0,5 |
| > 0,025 – ≤ 0,03 | ± 0,004 | - | ± 0,5 |
| > 0,03 – ≤ 0,04 | ± 0,005 | - | ± 0,5 |
| > 0,04 – ≤ 0,05 | ± 0,006 | - | ± 0,5 |
| > 0,05 – ≤ 0,06 | ± 0,008 | - | ± 0,5 |
| > 0,06 – ≤ 0,08 | ± 0,010 | - | ± 0,5 |
| > 0,08 – ≤ 0,10 | ± 0,015 | - | ± 0,5 |
| > 0,10 – ≤ 0,15 | ± 0,025 | ± 0,045 | ± 0,5 |
| > 0,15 – ≤ 0,30 | ± 0,035 | ± 0,060 | ± 1,0 |
| > 0,30 – ≤ 0,40 | ± 0,050 | ± 0,085 | ± 1,6 |
| > 0,40 – ≤ 0,50 | ± 0,060 | ± 0,110 | ± 1,6 |

Hot-rolled sheets


| Sheet thickness [mm] | Thickness tolerance | | Width tolerance [mm] |
|-------------------------|--|---|-------------------------|
| | Width ≤ 510 mm [mm or % of the thickness] | Maximal width 1200 mm [% of the thickness] | |
| 0,50 – ≤ 0,60 | ± 0,110 | | ± 1,6 |
| > 0,60 – ≤ 0,80 | ± 0,140 | | ± 2,0 |
| > 0,80 – ≤ 1,00 | ± 0,200 | | ± 2,0 |
| > 1,00 – ≤ 2,00 | ± 0,250 | | ± 2,0 |
| > 2,00 – ≤ 8,00 | ± 0,300 | | ± 2,0 |
| > 8,00 – 20,00 | ± 5% | ± 5% | ± 2,0 |

1.2 Length tolerance

The length tolerance for all dimensions is maximal + 5 mm and – 0 mm.
The maximum sheet dimensions depend on the sheet thickness. Other dimensions upon request.

1.3 Flatness

Flatness: max. 4 % (measuring procedure on the basis of ASTM B 760)

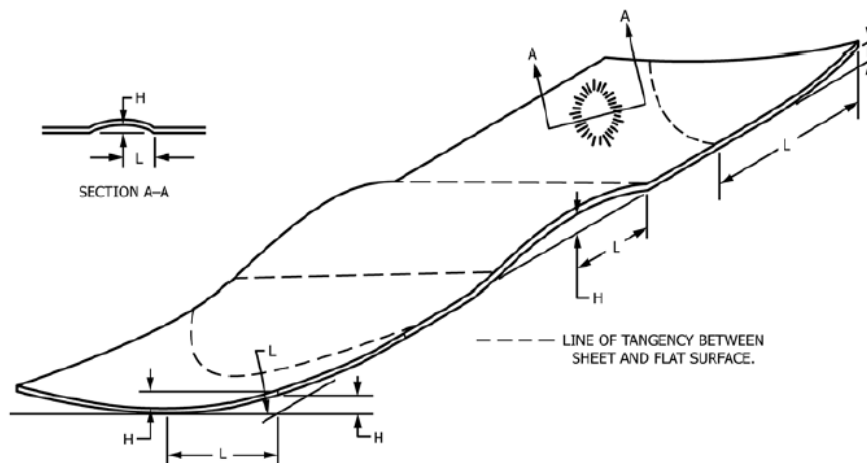

Flatness Deviation, % = $(H/L) \times 100$
 H = maximum distance between flat surface and lower surface of sheet.
 L = minimum distance between highest point on sheet and point of contact with flat surface.

1.4 Sheet cuts

These cuts are being produced from the sheets described in (1.1).

a) Tolerances for sheet cuts:

DIN-ISO 2768 Part 1 Tolerance class m (middle) for thickness < 15 mm

DIN-ISO 2768 Part 1 Tolerance class c (coarse) up to thickness 15 – 20 mm

b) Flatness:

The same specified limits as defined for sheets (see 1.3) apply for the sheet cuts.

c) Proportion of length to width:

The length and/or the width must in any case exceed the thickness, maximal width 1000 mm.

| Length [mm] | Minimal width [mm] |
|---------------|--------------------|
| 20 - 400 | 20 |
| > 400 - 1000 | 40 |
| > 1000 - 2000 | 60 |

d) Discs and Rings:

Stated below, minimal ring width, minimal hole diameter 3 mm.

| Diameter* [mm] | Minimal width for rings [mm] |
|----------------|------------------------------|
| ≥ 15 - 50 | 4 |
| > 50 - 100 | 10 |
| > 100 - 500 | 15 |
| > 500 - 1000 | 20 |

* Diameter for discs, external diameter for rings

Other dimensions on request.

2 Physical and mechanical product properties

2.1 Surface condition

| | | |
|-------------------------|---|-----------------------------------|
| Appearance: | The material shall be of uniform quality, free from foreign matter, splits and fractures. Bed sheets (not trimmed) may have small edge cracks. Surface defects are assessed in the frame of visual inspection. Local surface defects can be removed by grinding within the specified thickness tolerance. | |
| Surface quality: | Cold rolled, bright *: | Thickness $\leq 0,30$ mm |
| | Cold rolled, pickled: | Thickness $> 0,30 - \leq 0,50$ mm |
| | Hot rolled, pickled: | Thickness $\geq 0,50$ mm |

*) Due to process inherent reasons, the sheet sides may show different gloss.

2.2 Product Properties

| | | |
|--|--------------------------|-------------------------------|
| Density: ^a | $< 10,00$ mm | $\geq 19,2$ g/cm ³ |
| | $\geq 10,00 - 20,00$ mm | $\geq 19,1$ g/cm ³ |
| Vickers hardness: ^{b)} | Thickness in mm | Vickers hardness |
| | $\leq 0,10$ mm | ≥ 550 HV |
| | $> 0,10 - \leq 0,50$ mm | ≥ 500 HV |
| | $> 0,50 - \leq 1,50$ mm | ≥ 470 HV |
| | $> 1,50 - \leq 10,00$ mm | ≥ 450 HV |
| | $> 10,00 - 20$ mm | ≥ 420 HV |

a) The density cannot be determined with sufficient accuracy for small material thicknesses below 1 mm. Due to the high degree of deformation during production, it is assumed that the theoretical density (see above given values) is achieved.

b) The actual value quoted in certificates corresponds to the mean-value of a representative control sample.

Remarks: Upon request, the tungsten sheets are delivered stress-relieved annealed. We point out that the stress-relieved-annealing may lead to a material specific embrittlement

3 Chemical composition

| Main and Minor Components | Plansee Content | | Standard | EU-Directive |
|---|------------------------------|-----------------------------------|---------------------------|---------------------------|
| | | | ASTM B 760 | RoHS ^{a)} |
| W | 99.99 % ^{b)} | Min. 99,97 % ^{b)} | Balance | |
| Impurities | Max. Values [µg/g] | | Max. Values [µg/g] | Max. Values [µg/g] |
| | Typical | Guaranteed | | |
| Al | 1 | 15 | - | - |
| Cr | 3 | 20 | - | - |
| Cu | 1 | 10 | - | - |
| Fe | 8 | 30 | 100 | - |
| K | 1 | 10 | - | - |
| Mo | 12 | 100 | - | - |
| Ni | 2 | 20 | 100 | - |
| Si | 1 | 20 | 100 | - |
| C | 6 | 30 | 100 | - |
| H | - | 5 | - | - |
| N | 1 | 5 | 100 | - |
| O | 2 | 20 | 100 | - |
| Cd | 1 | 5 | - | 100 |
| Hg | - | 1 | - | 1000 |
| Pb | 1 | 5 | - | 1000 |
| Cr (VI) | | | - | 1000 |
| Organic Impurities (e.g. PBB, PBDE, PFOS, PFOA) | - **) | - **) | - | 1000 |

a) EU-directives 2015/863/EU, 2011/65/EU and 2000/53/EC.

b) Metallic purity without Mo

***) The presence of Cr (VI) and organic impurities can definitely be excluded because of the production process (multiple heat treatments at temperatures above 1000 °C in H₂-atmosphere).

The chemical composition is checked by means of random sampling. The sampling inspection plan, analysis and evaluation methods are determined in the internal instruction PSE-020-WI-003. The application of the measured values for the chemical analysis is defined in PSE-680-WI-001.

Remarks: The specified physical and chemical characteristics are disclosed not regarding measurement accuracy.

4 Packaging, labelling, storage and certification

4.1 Packaging, labelling and storage

Standard individual packing: depending on their size, the sheets will be either packed individually or in parcels with paper between the different pieces.

Each package will be provided with a label with the following information:

| | |
|------------------------------|---|
| Producer's name: | Plansee |
| Plansee order number: | |
| Lot number: | |
| Material number: | |
| Material: | W |
| Dimension: | e.g. thickness, width, length, diameter, etc. |
| Surface: | |
| Quantity: | Total quantity in kg or piece |
| Date: | |

The material must be kept in a dry place and protected from mechanical damage. It is best to keep the material in the original packing until used.

Special packing: (extra costs will be invoiced)

Special packing should be used if the material is stored under unusual conditions or aggressive atmosphere (e.g. sea air, ...).

4.2 Inspection documents

Following inspection documents will be supplied upon customer request according to EN 10 204:

Test report

Plansee confirms with this test report that the delivered product meets the specification and gives details of the material properties according to ongoing production surveillance, not directly related to the particular production batch.

Inspection certificate (extra costs will be invoiced)

An inspection officer from Plansee confirms with this inspection certificate that the delivered product meets the specification and gives test results related to the particular production batch.

5 Order instructions

Please quote following information when ordering:

- Product description
- Quality (the number of this specification must be mentioned)
- Dimension (thickness, width, length, diameter, etc.)
- Quantity (total quantity in kg or in piece)
- Required certificate and content in case of a 3.1 inspection certificate
- For special packing: Specification of packaging

For further information on our delivery possibilities. please look into our <http://www.plansee.com>

6 Referenced standards

The standards applied for the test methods are listed in the Plansee standard infobase and are made available upon request.

Changes to last version:

Replacement for PSE-605-PS-016 Rev.02

- New layout
- Section 1.4 Sheet cuts DIN-ISO 2768 Part 1 Tolerance class c (coarse) up to thickness 15mm
- Section 3 Min. content [%] replaced by content and c) Initial value removed